

## Phasing Cylinder




### 0.25" Sizes

Standard Stroke Lengths- 8", 12", 16", 18", 24", 36"

Part Number (xx = stroke)	Bore	Rod Dia	Closed Centres	Port	Pin	Stroke / Weight					
						8"	12"	16"	18"	24"	36"
PH 25xx	2.5"	1.125"	12.25" + Stroke	3/4 UNO	1.0"	11	12	14	15	18	23
PH 275xx	2.75"	1.125"				12	14	16	17	20	25
PH 30xx	3.0"	1.25"				13	16	18	19	22	29
PH 325xx	3.25"	1.25"				16	19	21	22	25	31
PH 35xx	3.5"	1.25"				18	23	24	25	28	38
PH 375xx	3.75"	1.375"				20	24	29	30	33	40
PH 40xx	4.0"	1.375"				22	25	30	31.5	34.5	42
PH 425xx	4.25"	1.375"				24	26	31.5	32.5	35.5	44
PH 45xx	4.5"	1.5"				26	30	33	34	37	47
PH 475xx	4.75"	1.5"				28	32	34.5	36	39	51
PH 50xx	5.0"	1.5"				30	34	36	38	41	54

Phasing can be on retraction, extension or both

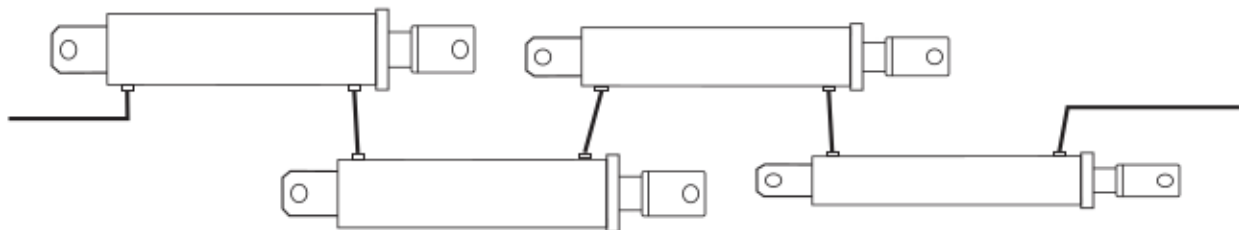

**ADMIN@GERRARDHYDRAULICS.COM.AU**

TEL: (08) 94552344 WEBSITE: <https://www.gerrardhydraulics.com.au/>  
39 Sorbonne crescent, Canning Vale 6155