


AG Cylinders



1.5" Bore

Max Pressure 3500 psi, 2.3 tonne capacity @ 3000 psi

Size	Stroke	Closed Centre	Rod	Pin	Ports	Weight
AG 1502	2.0"	11.5"	0.875"	0.75"	9/16 UNO	3.3 kg
AG 1504	4.0"	13.5"				3.8 kg
AG 1506	6.0"	15.5"				4.3 kg
AG 1508	8.0"	17.5"				4.8 kg
AG 1510	10.0"	19.5"				5.3 kg
AG 1512	12.0"	21.5"				5.8 kg
AG 1516	16.0"	25.5"				6.8 kg
AG 1518	18.0"	27.5"				7.3 kg
AG 1520	20.0"	29.5"				7.8 kg
AG 1524	24.0"	33.5"				8.8 kg
AG 1530	30.0"	39.5"				10.3 kg
AG 1536	36.0"	45.5"				11.8 kg
AG 1548	48.0"	57.5"				18 kg

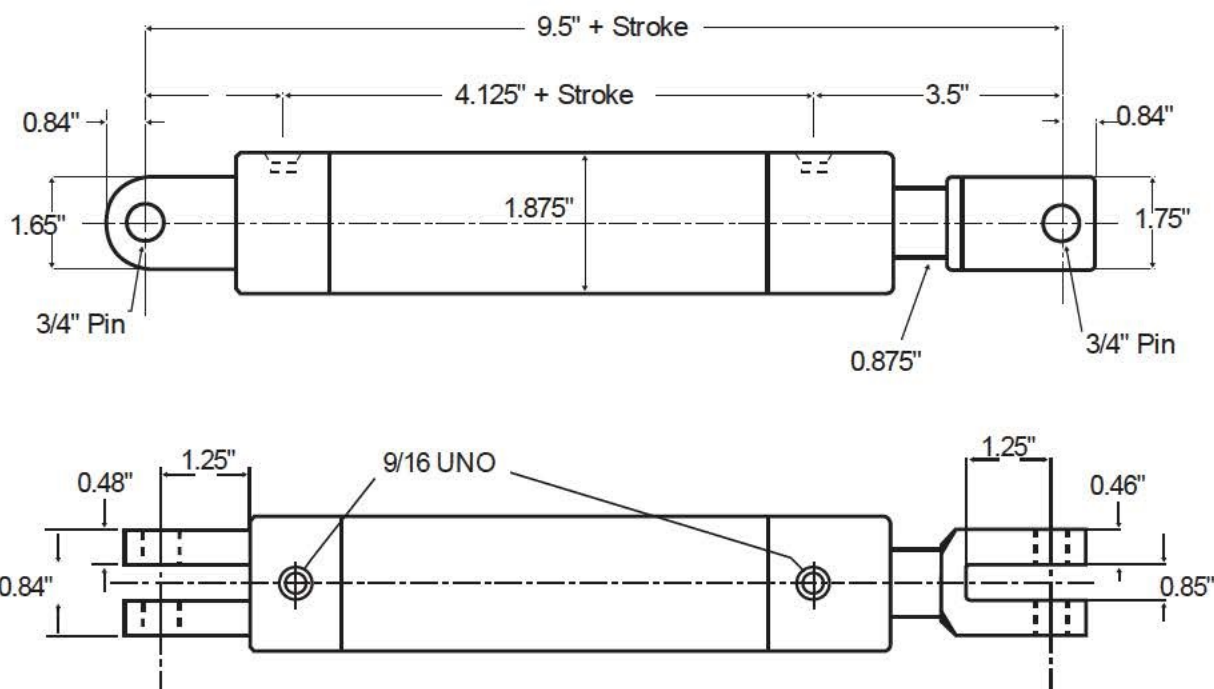





AG Cylinders

2.0" Bore

Max Pressure 3500 psi, 4.2 tonne capacity @ 3000 psi



Size	Stroke	Closed Centre	Rod	Pin	Ports	Weight
AG 2002	2.0"	12.25 + Stroke	1.25"	1.0"	9/16 UNO	7.4 kg
AG 2004	4.0"					8.2 kg
AG 2006	6.0"					9.0 kg
AG 2008	8.0"					9.8 kg
AG 2010	10.0"					10.6 kg
AG 2012	12.0"					11.4 kg
AG 2014	14.0"					12.2 kg
AG 2016	16.0"					13.0 kg
AG 2018	18.0"					13.8 kg
AG 2020	20.0"					14.6 kg
AG 2022	22.0"					15.4 kg
AG 2024	24.0"					16.2 kg
AG 2026	26.0"					17.0 kg
AG 2028	28.0"					17.8 kg
AG 2030	30.0"					18.6 kg
AG 2036	36.0"					21.0 kg
AG 2042	42.0"					23.4 kg
AG 2048	48.0"					25.8 kg

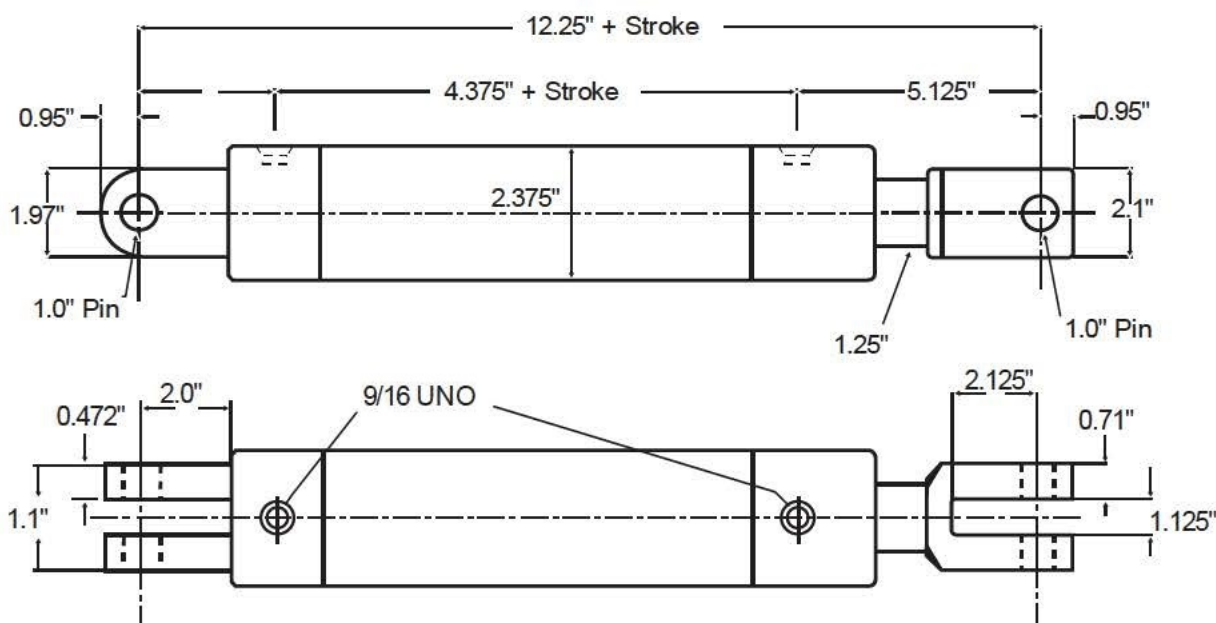





AG Cylinders



2.5" Bore

Max Pressure 3500 psi, 6.6 tonne capacity @ 3000 psi

Size	Stroke	Closed Centre	Rod	Pin	Ports	Weight
AG 2504	4.0"	12.25" + Stroke	1.5"	1.0"	3/4 UNO	9.0 kg
AG 2506	6.0"					10.0 kg
AG 2508	8.0"					11.0 kg
AG 2510	10.0"					12.0 kg
AG 2512	12.0"					13.0 kg
AG 2514	14.0"					14.0 kg
AG 2516	16.0"					15.0 kg
AG 2518	18.0"					15.0 kg
AG 2520	20.0"					16.0 kg
AG 2522	22.0"					17.0 kg
AG 2524	24.0"					18.0 kg
AG 2526	26.0"					19.0 kg
AG 2528	28.0"					20.0 kg
AG 2530	30.0"					21.0 kg
AG 2536	36.0"					23.0 kg
AG 2542	42.0"					26.0 kg
AG 2548	48.0"					29.0 kg

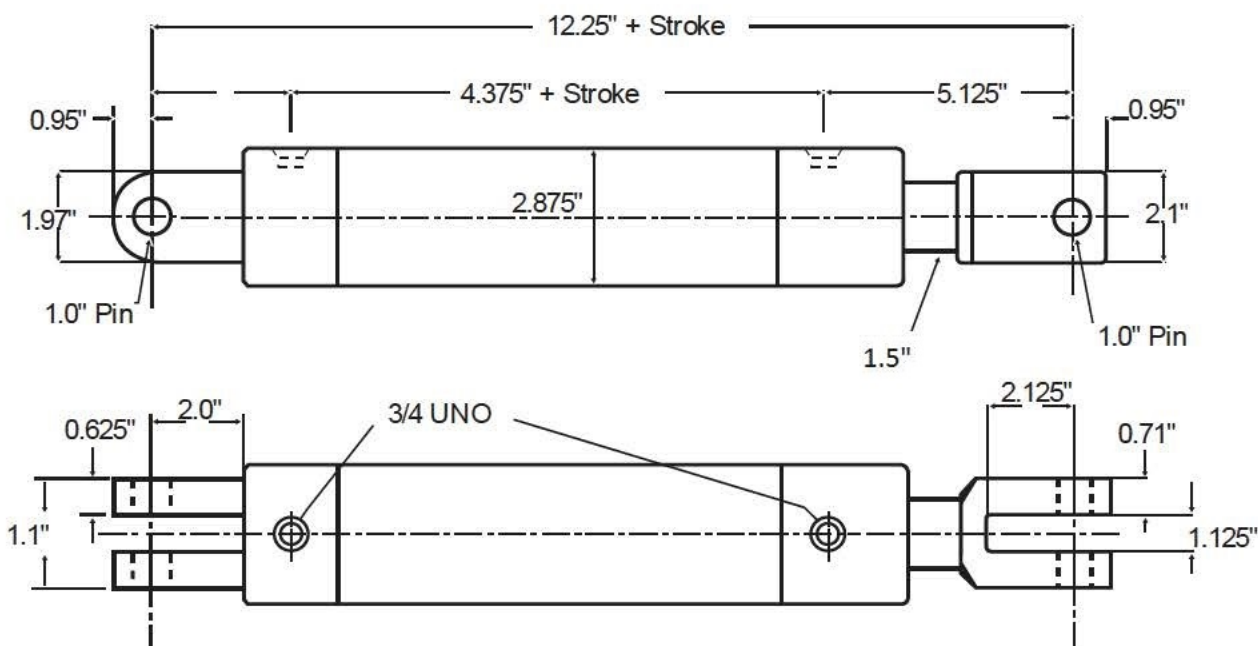





AG Cylinders



3.0" Bore


Max Pressure 3250 psi, 9.5 tonne capacity @ 3000 psi

Size	Stroke	Closed Centre	Rod	Pin	Ports	Weight
AG 3004	4.0"	12.25 + Stroke	1.5"	1.0"	3/4 UNO	12.0 kg
AG 3006	6.0"					13.0 kg
AG 3008	8.0"					14.0 kg
AG 3010	10.0"					15.0 kg
AG 3012	12.0"					17.0 kg
AG 3014	14.0"					18.0 kg
AG 3016	16.0"					19.0 kg
AG 3018	18.0"					20.0 kg
AG 3020	20.0"					21.0 kg
AG 3022	22.0"					22.0 kg
AG 3024	24.0"					23.0 kg
AG 3026	26.0"					24.0 kg
AG 3028	28.0"					26.0 kg
AG 3030	30.0"					27.0 kg
AG 3036	36.0"					30.0 kg
AG 3042	42.0"					33.0 kg
AG 3048	48.0"					37.0 kg

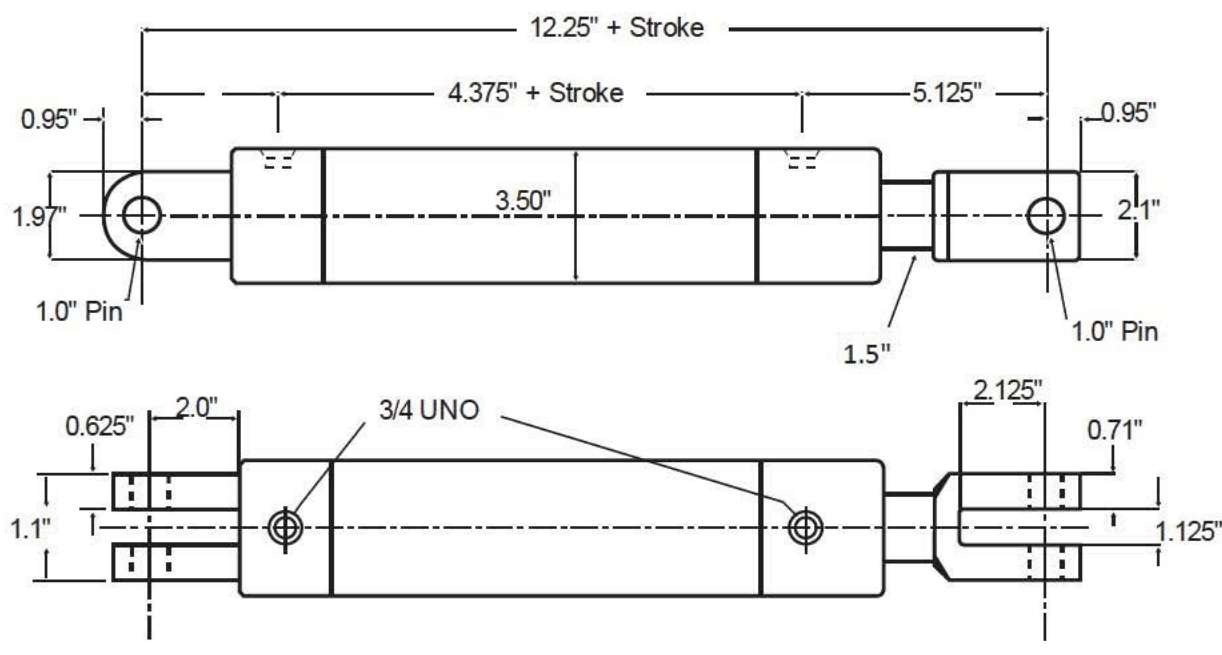

Max Pressure 3250 psi, 12.8 tonne capacity @ 3000 psi

<i>Size</i>	<i>Stroke</i>	<i>Closed Centre</i>	<i>Rod</i>	<i>Pin</i>	<i>Ports</i>	<i>Weight</i>
AG 3506	6.0"	12.25' + Stroke	1.75"	1.0"	3/4 UNO	22.0 kg
AG 3508	8.0"					23.0 kg
AG 3510	10.0"					25.0kg
AG 3512	12.0"					26.0 kg
AG 3514	14.0"					27.0 kg
AG 3516	16.0"					29.0 kg
AG 3518	18.0"					30.0 kg
AG 3520	20.0"					32.0 kg
AG 3524	24.0"					34.0 kg
AG 3530	30.0"					39.0 kg
AG 3536	36.0"					43.0 kg
AG 3542	42.0"					47.0 kg
AG 3548	48.0"					51.0 kg

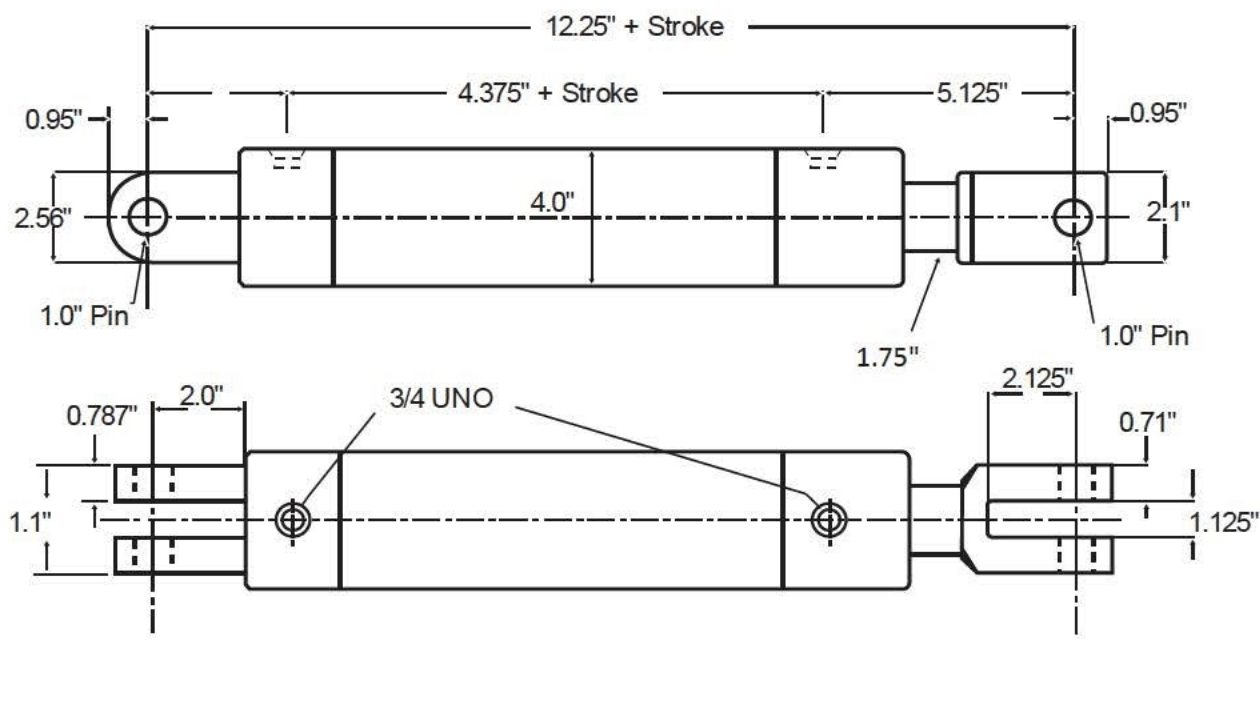




AG Cylinders



4.0" Bore

Max Pressure 3000 psi, 16.5 tonne capacity @ 3000 psi

Size	Stroke	Closed Centre	Rod	Pin	Ports	Weight
AG 4008	8.0"	12.25" + Stroke	1.75"	1.0"	3/4 UNO	23.0 kg
AG 4012	12.0"					26.0 kg
AG 4016	16.0"					29.0 kg
AG 4018	18.0"					30.0 kg
AG 4020	20.0"					32.0 kg
AG 4024	24.0"					35.0 kg
AG 4030	30.0"					39.0 kg
AG 4036	36.0"					44.0 kg
AG 4042	42.0"					48.0 kg
AG 4048	48.0"					53.0 kg

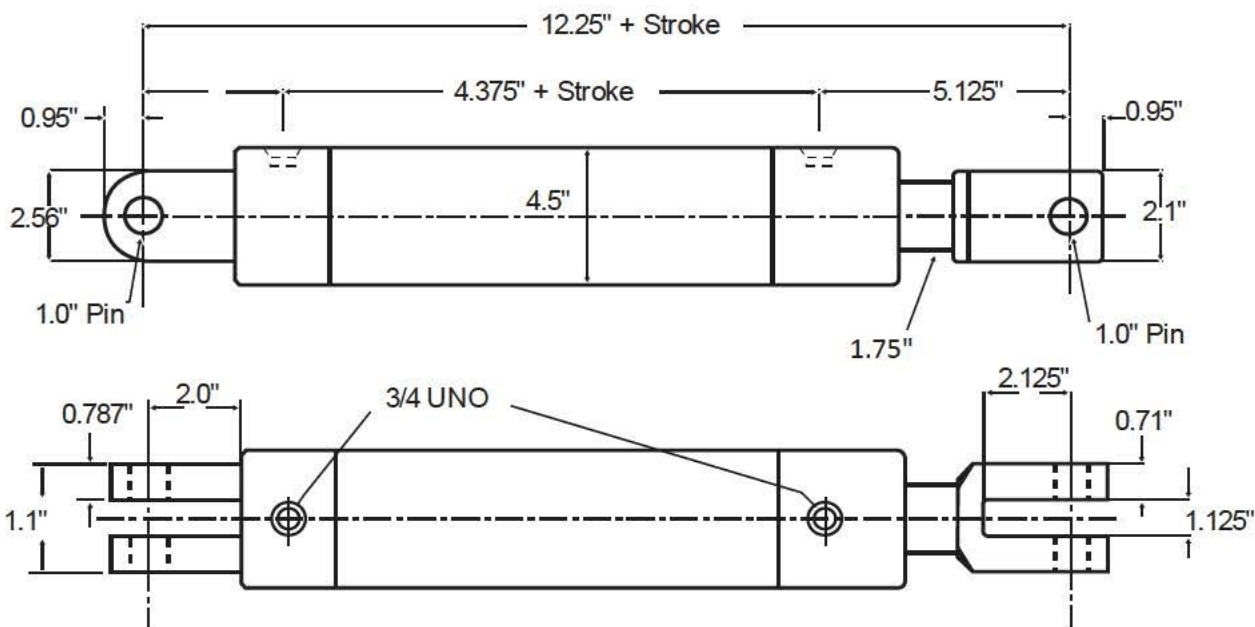

<i>Size</i>	<i>Stroke</i>	<i>Closed Centre</i>	<i>Rod</i>	<i>Pin</i>	<i>Ports</i>	<i>Weight</i>
AG 5008	8.0"	12.25" + Stroke	2.0"	1.0"	3/4 UNO	31.0 kg
AG 5012	12.0"					35.0 kg
AG 5016	16.0"					38.0 kg
AG 5018	18.0"					40.0 kg
AG 5020	20.0"					42.0 kg
AG 5024	24.0"					46.0 kg
AG 5030	30.0"					52.0 kg
AG 5036	36.0"					57.0 kg
AG 5048	48.0"					69.0 kg

